


**NEW!**

# LW 230 E II Compact



The Compact series is ideal for dive centers, ships and boats with limited space. Based on our 280 blocks, these compressors can be equipped individually and used as stationary system. They come fully wired with star/delta start system.

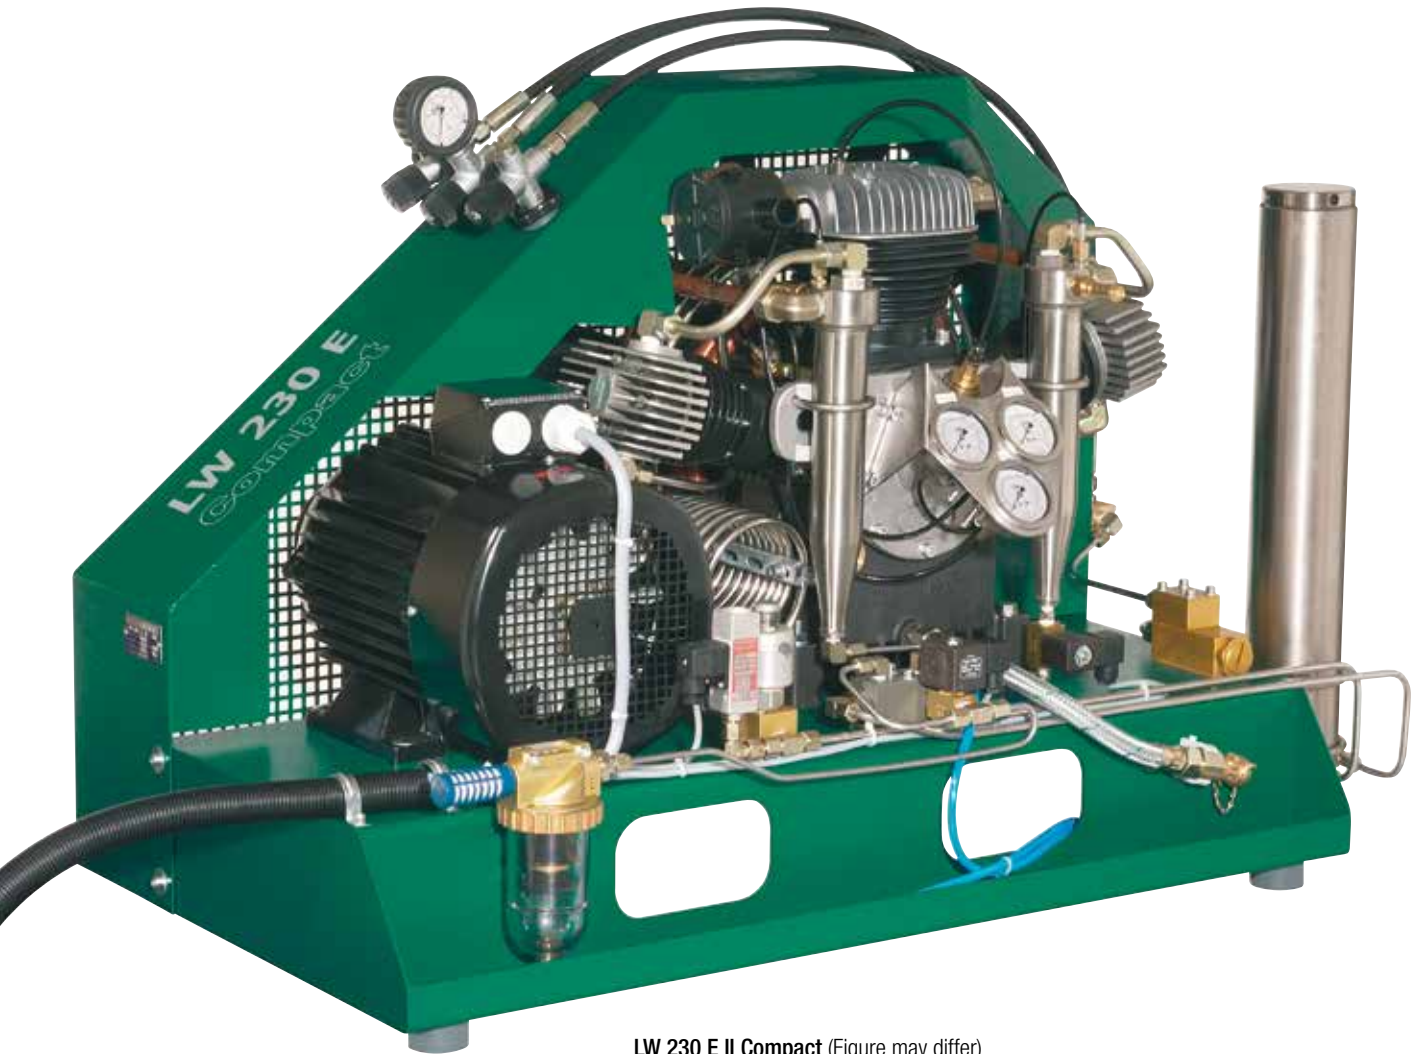

**LW 230 E II Compact** (Figure may differ)

With options auto drain, auto stop, oil pressure and inter-stage pressure gauges and 2 extra filling hoses.

# LW 230 E II Compact



## Specifications

- » Electro motor (E-Motor / 400V / 3 Phase / 50 Hz)
- » Powder coated steel frame and fan belt guard (RAL 6026)
- » Hour counter
- » Start/ Stop and emergency stop switch
- » Phase monitoring c/w shut down at wrong direction of rotation
- » Manual condensate drain
- » 1 x Filling hose c/w filling valve
- » Pressure maintaining and non return valve
- » All pistons c/w steel piston rings
- » **NEW** - Improved lubrication system with adjustable oil pump
- » Low pressure oil pump with oil sieve
- » Oil- / Water separators in stainless steel
- » Safety valves after each stage
- » 3x concentric suction/pressure valves
- » Filling pressure to your choice (200 or 300 bar)
- » Connections to your choice (DIN 200 bar or 300 bar, CGA 200 bar or 300 bar and INT)
- » Breathing air purification an accordance to EN 12021

## Options

- » **NEW** - Automatic condensate drain c/w condensate collection tank with venting silencer and Condensate-Stop-Valve
- » Automatic stop at final pressure
- » Auto start system
- » Motor protection switch
- » 200 and 300 bar parallel filling pressures
- » Oil pressure gauge and intermediate pressure gauges
- » Oil pressure monitoring c/w auto shut down
- » Cylinder head temperature monitoring with auto shut down
- » 0.8 l Prefilter (Enlarged the lifetime of the filter by approx. 5 hours)
- » Puracon filter monitoring (Auto shut down also available)
- » Additional high pressure outlet
- » Power cable and plug
- » Special voltages / frequencies on request



**NEW** - Adjustable oil pump with oil sieve

## Technical Data

LW 230 E II Compact	
Type:	Air cooled piston compressor
Capacity [litre/min] / [Nm <sup>3</sup> /h] / [cfm]:	230 / 13.8 / 8.1
Max. Pressure [bar]:	350
RPM [1/min]:	1080
No of cylinders / No of stages:	3 / 3
Prime mover type:	E-Motor / 400V / 3 Phase / 50 Hz
Drive power [kW] with 50 Hz / 60 Hz:	5.5 / 6.6
Cooling air req. [m <sup>3</sup> /h] with 50 Hz / 60 Hz:	1650 / 1980
Lubrication type:	Oil pump + Splash oil
Oil capacity [litre]:	1.8
Oil pressure [bar]:	1.8 (+/- 0.3)
Operating temperature [°C]:	+5°C to +45°C
Filter capacity [m <sup>3</sup> at +20°C] <sup>1)</sup> :	900 (at +20°C / approx. 72 h)
Dimensions W x D x H [mm]:	1200 x 600 x 900
Weight [kg]:	195
Noise level (measured at 1 m) [dB(A)]:	82

<sup>1)</sup> In accordance with EN 12021



เครื่องอัดอากาศ LW  
by JST Engineering  
LW compressors  
Authorized agent  
in Thailand

#เครื่องอัดอากาศ LW  
ในไทยที่เชื่อถือได้

**JST ENGINEERING CO.,LTD.** 

78/6 MOO 7 KINGKAEW RD., RACHATEWA.  
BANGPLEE, SAMUTPRAKARN 10540 THAILAND.

คุณวิโรจน์ 081-684-0565  
คุณอดิเทพ 098-825-8600  
คุณจักรภัทร 092-247-6565



Facebook Page

☎ +66 (0) 2738 5050-4    🌐 URL: www.jst.co.th  
☎ +66 (0) 2738 5055    📺 LINE ID: attitpejst  
✉ info@jst.co.th    📄 www.facebook.com/LWCompressor